


BRO

ROTHERS

LABELSTIK Sem

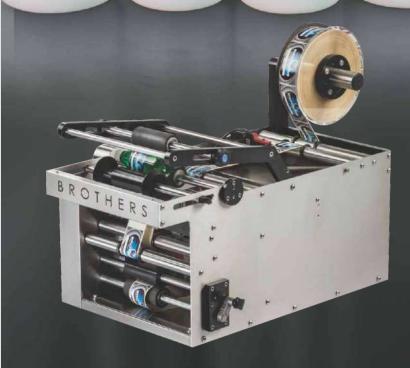

BUILT-IN UNIQUE FEATURES:

- No Label Data Input/retrievals require for any Label Size
- No Change Parts for Label size
- Synchronized speed of Label Dispensing system with product handling system.
- Virtually Maintenance free machine
- Easy to change Label position on products
- User Friendly Label Placing Adjustments
- Self Protected against Voltage Fluctuations
- Suitable for Partial, Full Wrap Around and Overlap Labelling
- Fully Stainless Steel finish Machine

Semi Automatic Horizontal Sticker Labelling Machine

The Semi Automatic Horizontal Sticker Labelling Machine Model LABELSTIK 20 & LABELSTIK-40, for applying Wrap Around Labels on Cylindrical or Round Products with output of 20 to 40 labels per minute depending on products and label size. Version 20 is suitable for using Small Diameter round products such as Ampoules, Vials, Test Tube, Inhaler, PFS etc. and Version 40 is suitable for Labelling on Vials and Bottles.

This Semi Automatic Version is developed for use of the customers having wide range of products but requiring lower rate of production for their round products, where Automatic Labelling Machine are not economical. No Change Parts required for Label size and Bottle Size for Version 40 but small Product holder is required as a change parts for Version 20 which is mainly suitable for PFS, Ampoule, Test Tubes, Inhaler etc.

LABELSTIK-20 is capable of Labelling upto 20 units per minute and LABELSTIK-40 is capable of Labelling upto 40 units per minute depending on product size, Label size and operator's loading and unloading speed. Machine is Table Top Model and can be used in any packaging area with ease.

LABELSTIK



Label Height: 8 mm to 50/70/90 mm Standard*

Label Length: 12 mm Minimum Label Roll Dia.: 300 mm Core Dia.: 75/76 mm

Gap Between two Labels : appx. 3 mm

Product Diameter : 9 mm to 20 mm for LABELSTIK-20*

40 mm to 90 mm for LABELSTIK-40*

Speed: Up to 20 Labels per minute for LABELSTIK-20

Up to 40 Labels per minute for LABELSTIK-40

Labelling Machine speed also depending on Product and

Label Size

Product Feeding & Collection : Manual by Operator

UTILITY REQUIREMENT:

Filtered Compressed Air : 4 to 5 Bar Air Pressure LABELSTIK-20 only.

Electrical: 220 VAC 1 Phase Power Supply (50/60 Hz)

Power: 0.5 Hp, 2.5 Amp. Capacity: 0.37 Kw

Phone: +91 79 40213213 / 25831346

* Specification can be changed as per customers requirements

Email: sales@brothers.in Export: sales1@brothers.in

www.brothersindia.com